


Sandblasted type.

Body and ball
Hand lever / butterfly handle
Ball seal
Stem seal
Medium and ambient temperature
Operating pressure
Applications

Nickel-plated brass
Plastic
PTFE
FKM
-10 °C to +90 °C
max. 10 bar
Compressed air, water, oils, non-toxic gases

Ball valves with butterfly handle


Art. No.	Type No.	Thread	a/f mm	DN	A mm	L mm	T mm	T1 mm
103327	373.01	G 1/4 female	20	8	-	41.5	9.0	10.5
103328	373.02	G 3/8 female	20	8	-	41.5	12.0	10.0
103329	373.03	G 1/2 female	24	10	-	47.0	12.5	10.5
103330	373.11	G 1/4 female /male	20	8	-	41.5	9.0	10.5
103331	373.22	G 3/8 female /male	20	8	-	41.5	10.0	10.0
103332	373.33	G 1/2 female /male	24	10	-	45.0	12.0	10.6



373.01

Ball valves with hand lever

Art. No.	Type No.	Thread	a/f mm	DN	A mm	L mm	T mm	T1 mm
103333	374.01	G 1/4 female	20	8	68.5	41.5	9.0	10.5
103334	374.02	G 3/8 female	20	8	68.5	41.5	12.0	10.0
103335	374.03	G 1/2 female	24	10	68.5	47.0	12.5	10.5
103336	374.11	G 1/4 female /male	20	8	68.5	41.5	9.0	10.5
103337	374.22	G 3/8 female /male	20	8	68.5	41.5	10.0	10.0
103338	374.33	G 1/2 female /male	24	10	68.5	45.0	12.0	10.6

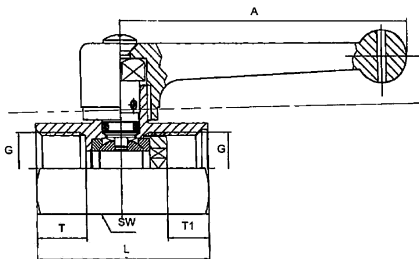

374.01