



Made of copper.

Temperature range: max. +250 °C



258.33

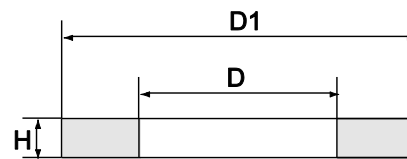

Sealing rings, copper

| Art. No. | Ident No. | For thread | D | D1 | H |
|----------|-----------|------------|-------------|-------------|----------|
| 258.30 | 114102 | M5 | 5.2 ±0.2 | 8.0 ±0.2 | 1.0 ±0.1 |
| 258.31 | 114103 | G 1/8 | 10.2 +0.3/0 | 13.4 0/-0.2 | 1.5 ±0.2 |
| 258.32 | 114104 | G 1/4 | 13.2 +0.3/0 | 17.9 0/-0.2 | 1.5 ±0.2 |
| 258.33 | 114105 | G 3/8 | 16.8 ±0.2 | 22.0 ±0.2 | 1.5 ±0.1 |
| 258.34 | 114106 | G 1/2 | 21.2 +0.3/0 | 27.9 0/-0.2 | 1.5 ±0.2 |
| 258.35 | 114107 | G 3/4 | 26.5 ±0.2 | 33.0 ±0.3 | 2.0 ±0.1 |
| 258.36 | 114108 | G 1 | 33.3 +0.3/0 | 38.9 0/-0.2 | 2.0 ±0.2 |