
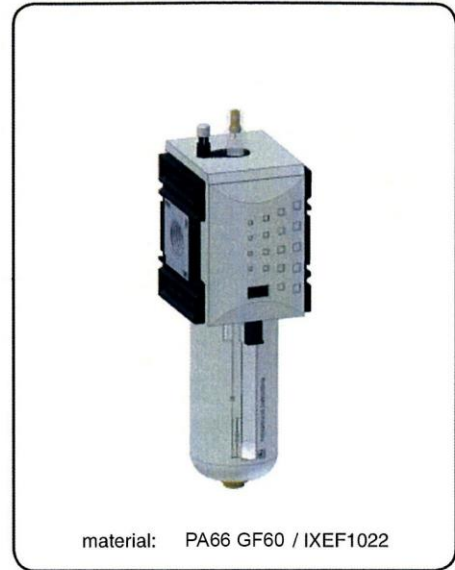
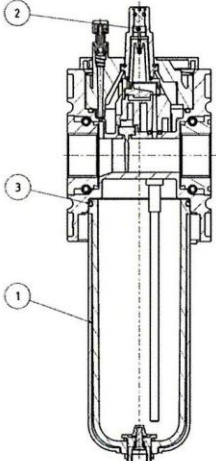


Kenngrößen	Typ	FU 6201	FU 6202
port size		G 3/4	G 1
description			
		lubricator with automatic oil filling	
medium		compressed air, neutral gases	
mounting		vertical	
medium- and ambient temperature		max. 50 °C	
supply pressure		Pe max. 16 bar	
bowl volume		oil quantity max.	
oil metering qv=1000l/min		1 - 2 drops/min	
oil type		CL 32 DIN 51517 - ISO VG 32	
fixing		mounting bracket, wall mounting	
weight		0,762 kg	

parts

no.	designation	material	order-no.
1	bowl	polycarbonate	
2	dome assembly	polycarbonate	
3	o-ring 55 x 2,5	NBR	




series 3


application information

- Can be filled with oil during operation
- Interlocking of several individual devices requires coupling kit(s)


dimensions (mm)

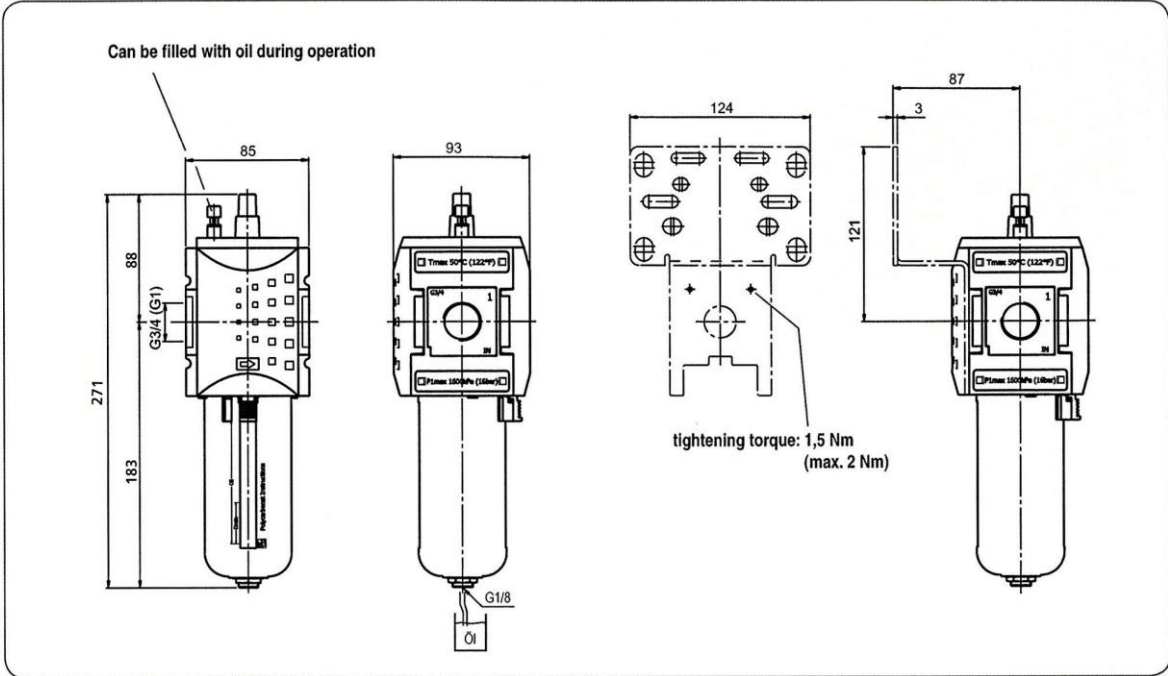

pressure characteristic

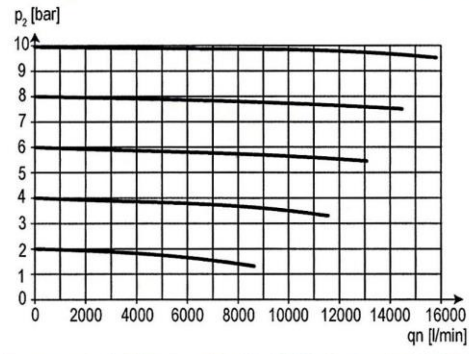

lubricator operating limit

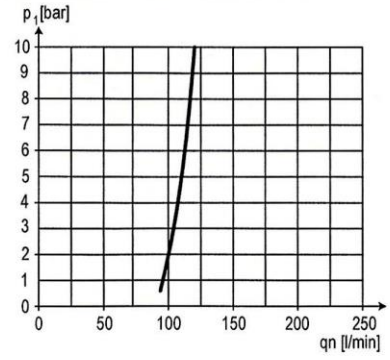

accessories 2

- mounting bracket with screws
- metal bowl with level indicator
- coupling kit
- coupling kit wall mounting