

These exceptionally elastic polyurethane hoses boast a recoil force similar to that of conventional polyamide spiral hose, but with less tendency to loop and significantly better resistance to abrasion.

There is consequently less danger of scratching coated or sensitive surfaces. The hose is extremely flexible and non-kinking.

Not suitable for direct attachment to pulsating tools.

We recommend using our vibration dampers, according to ISO 6150 § 7.1.

Shore Hardness	98A
Material	Polyester polyurethane
Operating temperature	-20 °C to 60 °C

### Spiral hose and coupling kit with quick disconnect coupling bare brass, DN 7.2 and push-in plug, bare brass

Art. No.	Type No.	Hose size mm	Coil O.D. mm	No. of coils	Max. operating pressure at 23 °C bar	Service length max. m*
158174	SP8300PUSK	8x5	42	29	12	3.0
158175	SP8600PUSK	8x5	42	64	12	6.0
158176	SP8750PUSK	8x5	42	83	12	7.5
158177	SP81000PUSK	8x5	42	110	12	10.0
158178	SP10300PUSK	10x6.5	69	16	11	3.0
158179	SP10600PUSK	10x6.5	69	37	11	6.0
158180	SP10750PUSK	10x6.5	69	41	11	7.5
158181	SP101000PUSK	10x6.5	69	63	11	10.0
158182	SP12300PUSK	12x8	82	14	10	3.0
158183	SP12600PUSK	12x8	82	31	10	6.0
158184	SP12750PUSK	12x8	82	38	10	7.5
158185	SP121000PUSK	12x8	82	54	10	10.0



SP8600PUSK

**Spiral hose and coupling kit with quick disconnect coupling galvanised steel, DN 7.8 and push-in plug, galvanised steel**

Artikel Nr.	Typen Nr.	Hose size mm	Coil O.D. mm	No. of coils	Max. operating pressure at 23 °C bar	Service length max. m*
158198	SP8300PUSSK	8x5	42	29	12	3.0
158199	SP8600PUSSK	8x5	42	64	12	6.0
158200	SP8750PUSSK	8x5	42	83	12	7.5
158201	SP81000PUSSK	8x5	42	110	12	10.0
158202	SP10300PUSSK	10x6.5	69	16	11	3.0
158203	SP10600PUSSK	10x6.5	69	37	11	6.0
158204	SP10750PUSSK	10x6.5	69	41	11	7.5
158205	SP101000PUSSK	10x6.5	69	63	11	10.0
158206	SP12300PUSSK	12x8	82	14	10	3.0
158207	SP12600PUSSK	12x8	82	31	10	6.0
158208	SP12750PUSSK	12x8	82	38	10	7.5
158209	SP121000PUSSK	12x8	82	54	10	10.0




SP8600PUSSK

## Spiral hose and coupling kit with pushbutton-type safety coupling DN 7.4 and push-in plug, galvanised steel

Artikel Nr.	Typen Nr.	Hose size mm	Coil O.D. mm	No. of coils	Max. operating pressure at 23 °C bar	Service length max. m*
158186	SP8300PUDSK	8x5	42	29	12	3.0
158187	SP8600PUDSK	8x5	42	64	12	6.0
158188	SP8750PUDSK	8x5	42	83	12	7.5
158189	SP81000PUDSK	8x5	42	110	12	10.0
158190	SP10300PUDSK	10x6.5	69	16	11	3.0
158191	SP10600PUDSK	10x6.5	69	37	11	6.0
158192	SP10750PUDSK	10x6.5	69	41	11	7.5
158193	SP101000PUDSK	10x6.5	69	63	11	10.0
158194	SP12300PUDSK	12x8	82	14	10	3.0
158195	SP12600PUDSK	12x8	82	31	10	6.0
158196	SP12750PUDSK	12x8	82	38	10	7.5
158197	SP121000PUDSK	12x8	82	54	10	10.0



SP8600PUDSK

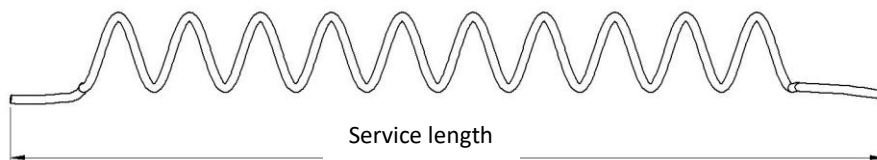

\*The service length is the maximum permissible extension (limit value). After exceeding the limit value, a permanent deformation can occur.