

NEW!

Quick & convenient to use Gear Puller upto **5X quick** than traditional pullers.

Speed:

Quick & convenient conversion from 2 to 3 jaw configurations. Jaws can also be reversed for internal or external pulling of gears & bearings.

Easy Access:

Slim profile of jaws enables convenient access to hard to reach bearings & gears

Strength:

Jaws forged from Chrome Molybdenum steel with accurate heat treatment for enhanced strength & wear resistance

Jaws are chrome plated with spindle in manganese phosphate finish for protection against corrosion & rust

Versatility:


Easily removable jaws for setting to required jaw configuration or internal/external setting

Ratcheting mechanism holds jaws in position while setting puller

Used to pull out gears, pulleys, bearing flanges & fly wheels, shafts and housings



- ✓ SPEED
- ✓ ACCESS
- ✓ STRENGTH
- ✓ VERSATILITY

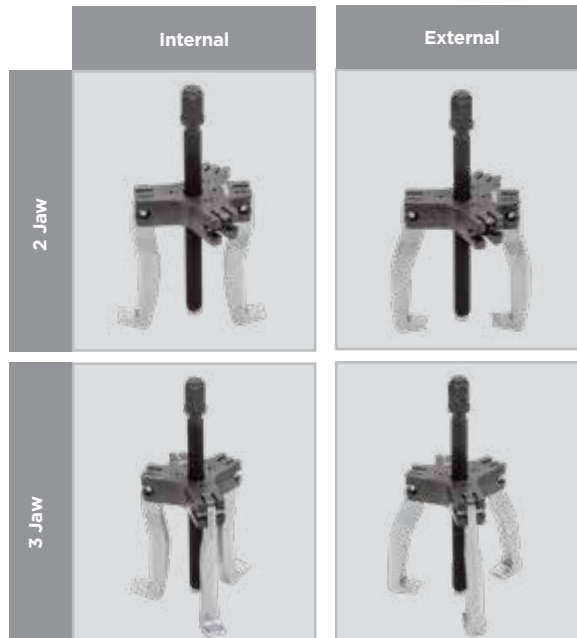

Easy switch between 2 Jaw & 3 Jaw options
No extra tools required.

ORDERING INFORMATION

CAT NR.	ORD NR.	MAX. REACH		SPREAD		SAFE WORKING LOAD (TON)
		(INCH)	(MM)	(INCH)	(MM)	
BPL/RT/2T	36040	3.1	80	2.0 - 3.1	50 - 80	2
*BPL/RT/5T	36041	6.0	150	3.9 - 6.0	100 - 150	5
BPL/RT/7T	36042	8.6	218	4.9 - 8.6	125 - 218	7

* Best Seller

