


# PREMIUM MOTOR OIL

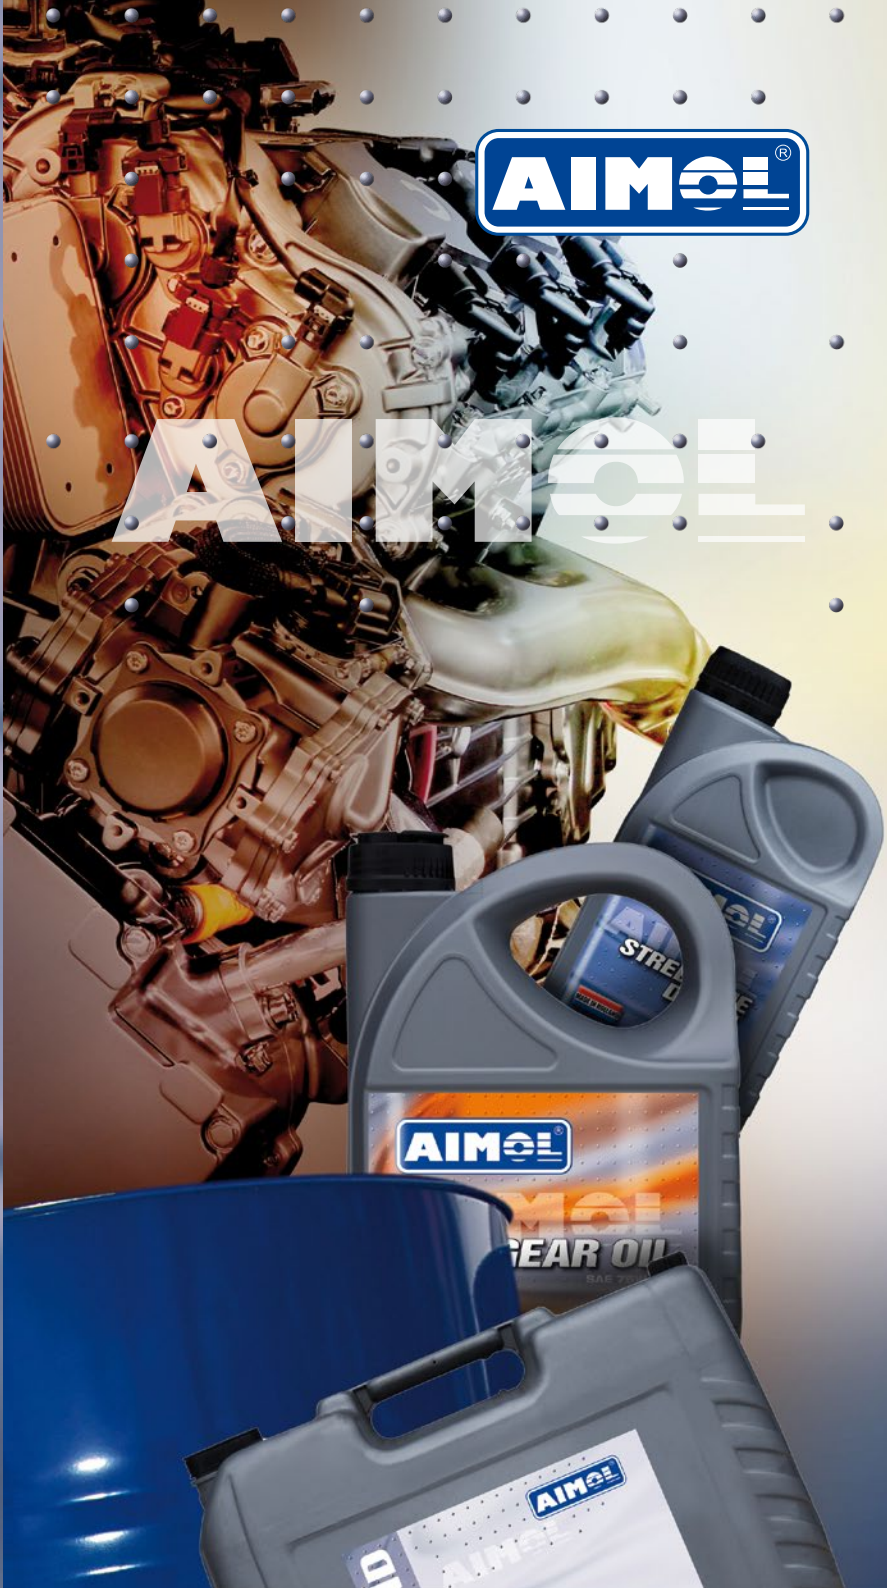

**AIMeL**<sup>®</sup>

AIMeL

**AIMeL**<sup>®</sup>

**GEAR OIL**

SAE 75W-90

**AIMeL**<sup>®</sup>

10

AIMeL



# PREMIUM MOTOR OIL

**AIMOL produces high-quality lubricants for automotive use, for motorsports and for every industrial application.**

Applying all available technologies, which we significantly improved in the last 30 years, we can guarantee 'friction-free' performance of transport and industrial equipment. AIMOL guarantees reliable high quality products for all your engines and machines.



## SPORTLINE 0W-40

High quality full synthetic motor oil based on PAO technology.

**Specification:** API: SN/CF • ACEA: A3/B4 • VW: 502.00-505.00 • MB: 229.5 for AMG • BMW: Long life-01 • Porsche: A40  
**Packings:** 1, 4, 20 and 205 Litre  
**SAE Grade:** 0W-40



## SPORTLINE 10W-60

High quality full synthetic motor oil based on PAO technology.

**Specification:** API: SM/CF • ACEA: A3/B4 • VW: 500.00-505.00 • MB: 229.1 • BMW: Special Oil • Porsche  
**Packings:** 1, 4, 20 and 205 Litre  
**SAE Grade:** 10W-60



## SPORTLINE 5W-50

High quality full synthetic motor oil based on PAO technology.

**Specification:** API: SN/CF • ACEA: A3/B4 • MB: 229.1-229.3 • VW: 502.00-505.00 • BMW: LL-01 • Porsche: A40 • Renault: RN0700-RN0710 • PSA: B71 2296 • GM: LL-B-025  
**Packings:** 1, 4, 20 and 205 Litre  
**SAE Grade:** 5W-50



## PRO LINE 5W-40

Full synthetic long-life motor oil especially developed to meet the Mercedes Benz MB 229.5 requirements.

**Specification:** **Approvals:** MB-approval 229.5 MB: 226.5 • API: SN/CF • ACEA: A3/B4 • PSA: B71 2296-B71 2293 • GM: LL-B-25 • VW: 502.00-505.00 • BMW: Longlife-01 • Porsche: A40 • Renault: RN0710-RN0700 • Fiat: 9.55535-M2-955535-H2  
**Packings:** 1, 4, 20 and 205 Litre  
**SAE Grade:** 5W-40



## PRO LINE M 5W-30

Full synthetic longlife motor oil based on mid-saps technology.

**Specification:** **Approvals:** MB-approval 229.51 • MB: 2299.31 • BMW: Longlife -01- Longlife -04 • API: SN/CF • ACEA: C3 • GM: Dexos 2 & LL-A-025 • VW: 502.00-505.00-505.01 • Ford: M2C-917A  
**Packings:** 1, 4, 20 and 205 Litre  
**SAE Grade:** 5W-30



## PRO LINE F 5W-30

Full synthetic motor oil with low HTHS (high temperature high shear) technology.

**Specification:** **Approvals:** Ford-approval WSS-M2C-913D • Ford WSS-M2C-913C - WSS-M2C-912A -913A-B • ACEA A5/B5 • ACEA A1/B1  
**Packings:** 1, 4, 20 and 205 Litre  
**SAE Grade:** 5W-30



## PRO LINE V 5W-30

Full synthetic motor oil with high HTHS (high temperature high shear) technology.

**Specification:** **Approvals:** Volkswagen-approval 504.00-507.00 • ACEA: C3 • MB: 229.51 • BMW: LL 04 • Porsche: C30  
**Packings:** 1, 4, 20 and 205 Litre  
**SAE Grade:** 5W-30



## PRO LINE B 5W-30

Full synthetic longlife motor oil based on mid-saps technology.

**Specification:** BMW: Longlife-01- Longlife-04 (approvable) • API: SN/CF • ACEA: C3 • MB: 229.31-229.51 • GM: Dexos 2 & LL-A-025-B-025 • VW: 502.00-505.00-505.01 • Ford: M2C-917A  
**Packings:** 1, 4, 20 and 205 Litre  
**SAE Grade:** 5W-30



## X-LINE 5W-20

Full synthetic motor oil with low HTHS (high temperature high shear) and mid SAPS technology.

**Specification:** API: SN-RC • ILSAC: GF-5 • GM: Dexos 1 - LL-A-025 - 6094M - 4718M  
**Packings:** 1, 4, 20 and 205 Litre  
**SAE Grade:** 5W-20



## X-LINE 0W-20

Full synthetic motor oil with low HTHS (high temperature high shear) and mid SAPS technology.

**Specification:** API: SN-RC • ILSAC: GF-5  
**Packings:** 1, 4, 20 and 205 Litre  
**SAE Grade:** 0W-20



CAR +  
SMALL  
TRUCK

## STREETLINE 5W-40

Highest quality full synthetic motor oil for use in almost all engines of passenger cars and light trucks with or without catalytic converter and/or turbocharger.

**Specification:** API: SN/CF • ACEA: A3/B4 • MB: 229.1-229.3 • VW: 502.00-505.00 • BMW: Longlife-01 • Porsche  
**Packings:** 1, 4, 20 and 205 Litre  
**SAE Grade:** 5W-40

CAR +  
SMALL  
TRUCK

## STREETLINE 10W-40

Superior quality synthetic motor oil for petrol and diesel engines of passenger cars, vans with or without catalytic converter and/or turbocharger.

**Specification:** API: SM/CF • ACEA: A3/B4 • MB: 229.1 • VW: 500.00-505.00 • BMW: Special Oil • Porsche  
**Packings:** 1, 4, 20 and 205 Litre  
**SAE Grade:** 10W-40

CAR



## POWERLINE N

Synthetic engine oil developed to reduce/improve fuel economy.

**Specification:** API: SN For 10W-40 also: ACEA: A3/B4 • MB: 229.1-229.3 • VW: 501.01-505.00 • RN: 0700-710  
**Packings:** 4, 20 and 205 Litre  
**SAE Grade:** 5W-30 • 5W-40 • 10W-40

CAR



## POWERLINE M

Universal synthetic high performance engine oil for use in gasoline and diesel engines of passenger cars and light vans with or without turbo.

**Specification:** API: SM/CF • ACEA: A3/B3 • MB: 229.3 • Porsche: A40 • VW: 502.00-505.00 • Renault: RN710-700  
**Packings:** 4, 20 and 205 Litre  
**SAE Grade:** 5W-40

CAR



## POWERLINE L

Universal synthetic high performance engine oil for use in gasoline and diesel engines of passenger cars and light vans with or without turbo.

**Specification:** API: SL/CF • ACEA: A3/B4  
**Packings:** 4, 20 and 205 Litre  
**SAE Grade:** 5W-30 • 10W-40

CAR



## POWERLINE J

Universal engine oil for use in gasoline and diesel engines of passenger cars and light vans with or without turbo.

**Specification:** API: SJ/CF • ACEA: A3/B3 (10W-30 & 15W-40) (15W-40: B4) CCMC: G5 (10W-30 & 20W-50)  
**Packings:** 4, 20 and 205 Litre  
**SAE Grade:** 10W-30 • 15W-40 • 20W-50

CAR +  
SMALL  
TRUCK

## PREMIUM MOTOR OIL

Universal mineral motor oil.

**Specification:** -  
**Packings:** 1, 4, 20 and 205 Litre  
**SAE Grade:** 10W • 30 • 40 • 50 • 15W-40 • 20W-50

TRUCK



## TURBO

Heavy Duty all-season, mix-fleet engine oil

**Specification:** API: CG-4/SJ • ACEA: B3/A3 • Volvo: VDS • Volkswagen: 501.01-505.00 • Mack: EO-L • MAN: 271  
**Packings:** 20 and 205 Litre  
**SAE Grade:** 20W-50 • 15W-40

TRUCK



## TURBO LD

Heavy duty all-season long drain diesel engine oil.

**Specification:** **Approvals (15W-40): Volvo-approval VDS 3** • API: CI-4/SL • ACEA: E7 • M.A.N.: 3275 (271) • VW: 501.01-505.00 • MTU: Type 2 • ZF-TE-ML: 02C-03A-04B-04C-07C • Renault: RLD-2 • MB: 228.3-228.1-229.1 • Volvo: VDS 2 & 3 (15W40 official approval for VDS 3) • Global: DHD1 • Allison: C-4 • Mack: EO•M Premium Plus • Cummins: 20071-76-78-20072-77 • Caterpillar: ECF-2  
**Packings:** 20 and 205 Litre  
**SAE Grade:** 10W-30 • 15W-40 • 20W-50

TRUCK



## TURBO LD CNG

Multigrade Heavy Duty Gas Engine Oil.

**Specification:** **Approvals: Cummins-approval 20074** • API: CF • Detroit Diesel: DDC 93K216  
**Packings:** 20 and 205 Litre  
**SAE Grade:** 15W-40





## TURBO LD PLUS

Synthetic technology based motor oil for all-season use in heavy diesel engines. Also suitable for gasoline, LPG and light diesel engines.

**Specification:** API: CI-4 plus/SL • ACEA: A3/B3/E7 • Volvo: VDS 2 & 3 • MB: 228.3-229.1 • MAN: 3275 (271) • Global: DHD1-DLD1-DLD3 • VW: 500.00-505.00 • Allison: C-4 • MTU: Type 2 • Mack: EO-M Plus • ZF-TE-ML: 04C•07C

**Packings:** 20 and 205 Litre  
**SAE Grade:** 10W-40



## TURBO XLD

Universal SHPD (Super High Performance Diesel) oil.

**Specification:** **Approvals: Volvo-approval VDS 4** • API: CJ-4/CI-4 plus/SM • ACEA: E7/E9 • MB: 228.31 • MAN: M3575 • MTU: Type 2.1 • RVI: RLD-3 • Mack: EO-O PP • Scania: Low Ash • Caterpillar: ECF-3-ECF-2-ECF-1° • Cummins: CES 20081 • Detroit Diesel: 93K218-93K215-93K214 • Deutz: DQC III-10-LA • Allison: C-4 • Global: DHD-1 • JASO: DH-2

**Packings:** 20 and 205 Litre  
**SAE Grade:** 15W-40



## TURBO SYNTH ULTRA

Fully synthetic motor oil based on low SAPS technology.

**Specification:** **Approvals: MB-approval 228.51 • M.A.N. 3575 / 3271-1 / 3477** • MB: 226.9 • ACEA: E6/E7 • API: CI-4 • M.A.N.: 3477-3271-1 • Volvo: VDS 3 • DAF • Deutz: DQC-III-10 LA • Renault: RXD-RLD-2-RGD • Mack: EO-N • Cummins: 20076-20077 • Jaso: DH-2 • CES: 20076-20077 • MTU: Type 3.1

**Packings:** 20 and 205 Litre  
**SAE Grade:** 10W-40



## TURBO SYNTH ULTRA

Fully synthetic motor oil based on low SAPS technology.

**Specification:** **Approvals: M.A.N. 3677 / 3271-1 / 3477** • M.A.N.: 3477 Euro 4-5 • M.A.N.: 3677 Euro 6 • M.A.N.: 3271-1 LPG- and CNG engines • API: CJ-4/SN • Volvo: VDS 3 & 4 & CNG • MTU: 3.1 • Deutz: DQC-IV-10 LA • Renault: RXD-RLD-3-RLD-2-RGD • ACEA: E6/E7/E9 • MB: 228.51-228.31 • Mack: EO-O Premium Plus- EO-N Premium Plus- EO-M Plus • Cummins: 20081 • Caterpillar: ECF-3 • JASO: DH-2

**Packings:** 20 and 205 Litre  
**SAE Grade:** 5W-30



## 2T CITY

Synthetic low smoke oil developed for the lubrication of air- and water cooled 2- stroke engines (radiator cooling), with or without catalytic converter: bikes, off road bikes, scooters (up to 50 cc), ATV.

**Specification:** API: TC+ • ISO-L-EGD • JASO: FD (low smoke) • TISI • Piaggio SI  
**Packings:** 1 and 20 Litre



## 2T SPORT

Fully synthetic low smoke oil developed for the lubrication of air- and water cooled 2 stroke engines, suitable for use in both premix and oil injection system for leaded and unleaded fuel.

**Specification:** API: TC+ • ISO-L-EGD • JASO: FD (low smoke) • TISI • Piaggio Hexagon • Husqvarna 266 • Chainsaw  
**Packings:** 1 and 20 Litre



## 4T TOURING

Mineral motor oil without friction modifiers developed for use in 4 stroke motorcycles and scooters.

**Specification:** API: SG • JASO: MA2 & MA  
**Packings:** 1 and 20 Litre  
**SAE Grade:** 20W-50



## 4T CITY

Synthetic technology engine oil without friction modifiers developed for use in 4-stroke motorcycles and scooters.

**Specification:** API: SL • JASO: MA-2 & MA  
**Packings:** 1 and 20 Litre  
**SAE Grade:** 10W-40



## 4T RACE BIKE

Fully synthetic engine oil (contains a dedicated ester technology) without friction modifiers developed for use in 4-stroke motorcycles and scooters operating over a wide range of temperatures and rpm.

**Specification:** API: SL • JASO: MA-2 & MA  
**Packings:** 1 and 20 Litre  
**SAE Grade:** 5W-40



## GEAR OIL GL 1

Mineral gear oil for various transmission applications.

**Specification:** API: GL 1 • Premium general purpose  
**Packings:** 20 and 205 Litre  
**SAE Grade:** 90 • 140



## GEAR OIL GL 4

Mineral gear lubricating for mechanical transmissions with special EP additives.

**Specification:** API: GL4 • MIL-L-2105  
**Packings:** 20 and 205 Litre  
**SAE Grade:** 80W-90



## GEAR OIL GL 4

Gear oil on synthetic basis for mechanical transmissions with special EP additives.

**Specification:** API: GL4 • MIL-L-2105  
**Packings:** 20 and 205 Litre  
**SAE Grade:** 75W-90



## AXLE OIL GL 5

Hypoid mineral gear lubricant for mechanical transmissions and/or differentials.

**Specification:** 80W-90 & 85W-140: API: GL-5 • MIL-L-2105D • Mack: GO-G • ZF TE-ML 05A-12A • MAN: 342 N-342 typ M-1 • MT-1 For 80W-140 also: MB: 235.0 • ZF TE-ML 05A,07A,08,16F,17B • Volvo: 97310 • RVI 03-80-4003  
**Packings:** 20 and 205 Litre  
**SAE Grade:** 80W-90 • 85W-140 • 80W-140



## AXLE OIL GL 5

Hypoid gear oil on synthetic basis for high loaded mechanical transmission and/or differentials which require API GL-5 oil

**Specification:** API: GL-5 • ZF-TE ML 05A•12A • Mil-L-2105D • MAN: 342N-342 type M-1 • Mack: GO-G  
**Packings:** 20 and 205 Litre  
**SAE Grade:** 75W-90



## SUPERGEAR

EP-oil for gearboxes and heavily loaded hypoid gears.

**Specification:** API: GL-3/4/5 and MT-1 • MIL-L-2105B-C-D-E • ZF TE-ML: 01, 02B, 05A, 07A+B, 08, 12E, 16B+C+D, 17B • MB: 235.0 • Scania: STO-1 and 2 • Volvo: 97310 • MAN: 341ML, 342ML, 3341ML  
**Packings:** 1, 20 and 205 Litre  
**SAE Grade:** 80W-90



## SYNTHGEAR

Full synthetic EP-oil for gearboxes and heavily loaded hypoid gears.

**Specification:** API: GL-3/4/5, MT-1 • MIL-L2105 B-C-D • MIL-PRF-2105 E • Scania: STO-1 • DAF rear axle 2 years - 300.000 km • MB: 235.8, 235.11 • Volvo: 97310 • MAN: 3343 S-SL • ZF TE-ML: 01, 02B, 05B, 07A, 08A, 12, 16F, 17B, 19C  
**Packings:** 1, 20 and 205 Litre  
**SAE Grade:** 75W-90



## ATF DEXRON® II

Automatic Transmission Fluid.

**Specification:** Dexron® II • GM (former Dexron® II) • Allison: C 4 • Renk • MB: 236 1-5-7-9 • ZF TE ML 09-11-14 • Voith: G 607-H55.6335.34 • Vickers: D 2882-35 VQ 25 • Denison: HF 0 • Ford: M2C 166 H-138 CJ-33F G • Man: 339D-339 V1-Z1 • Caterpillar: TO 2  
**Packings:** 1, 20 and 205 Litre



## ATF DEXRON® III

Automatic Transmission Fluid.

**Specification:** Dexron® III • GM: DEXRON® III (F en G) • Allison: C-4 • Ford: MERCON • MB: 236.1—5-9 • Voith: G 607-H55.6335.34 • ZF TE ML 03D-04D-09B-11A-14B-17C • MAN: 339F-339 V1 & 339 Z1 • DEXRON® II-E, II-D, B, AQ-ATF type A • MERCON: M2C 138-CJ, M2C 166-H • Caterpillar TO-2 • Renk Doromat • Volvo: 97335 -12  
**Packings:** 1, 20 and 205 Litre



## ATF MULTI

Full Synthetic Transmission Fluid.

**Specification:** Allison: C-4 • ZF TE ML 09X- 11B- 14B • Toyota: T-III; T-IV • Mercon, Mercon V • Hyundai and Mitsubishi SP, SP- II and III • MAN 339 type D & F; Z1-V1 & Z2 • Isuzu • Saab 93 165 147 • ATF 7045E, ATF 1375.4 and LA 2634 • Nissan: Matic D, J and K • Mazda: M-III • Idemitsu: K7 • VOITH: G-1363-G-607 • Caterpillar: TO-2 • MB: 236.1...236.9 • Dexron® II and III • Volvo: 1161540 • Audi: G-055-025-A • ATF LT 71141 • BMW: LT-2 • Ford: M2C-138CJ, 166H, 202B • JASO: M 315 1A • JATCO: 3100 PL 085 • VW: G 052 162 A1 • GM: 9986195, JWS 3309-3314-3324 • Subaru: K0410Y0700

**Packings:** 1, 20 and 205 Litre



## POWERSTEERING FLUID

Mineral Power Steering Fluid • Hydraulic Oil • Automatic Transmission Fluid.

**Specification:** GM: Power Steering Fluid A (suffix A) • Renk Doromat • John Deere: JDM J21A • MB: 236.2 • MAN: 339 type A • Allison: C-3

**Packings:** 20 and 205 Litre



## CVT FLUID

AIMOL CVT Fluid is a full synthetic transmission oil for modern Continuous Variable Transmissions (CVT).

**Specification:** BMW: 83 22 0 136 376-83 22 0 429 154 • Chrysler: CVTF+4-CVT EZL 799 A • Daihatsu AMIX CVT Fluid DC-CVTF DFE • Daihatsu-Suzuki: TC DEX-CVT • Dia Queen: CVTF J1-J4 • Elf Natic CVT • EZL-799 • Ford: CVT23 • MB: 236.20 • Mopar: CVTF +4 • Nissan NS3-NS2-NS1 • Subaru: Lineartronic CVTF • Suzuki: CVT Green 1-CVTF Green 2-NS2 • Toyota: CVT FE-CVT TC • VW: G 052 180-G 052 516 • Ford: WSS-M2C928-A

**Packings:** 1 Litre



## DCT FLUID

Full synthetic transmission oil for transmissions with a double clutch.

**Specification:** BMW: DCTF1-MTF LT-5 • Chrysler: 68044345EA • Ferrari: TF DCT-F3 • FFL-2, FFL-3, FFL-4 • Fiat: 9.55550-MZ-6 • Ford: WSS-M2C936-A • MB: 236.21-236.25 • Mitsubishi: Diamond Queen • Nissan : R35 Special • Porsche: 000 043 206 56 - 000 043 207 30 - 043 207 29 • PSA: 9734 52 • Renault: BOT 450 EDC 6-speed • SSTF-1 • Volvo: BOT 341 #1161838 • VW: G 052 513 • G 052 182 • G 052 529

**Packings:** 1 Litre



## CATGEAR

Mineral gear lubricant for mechanical transmissions, differentials, final drives and hydraulic systems.

**Specification:** API: CF, CF-2 • CAT: TO-4 • ZF: TE ML 01, 03 • Allison: C-4 • Komatsu: KES 07.868.1

**Packings:** 20 and 205 Litre

**SAE Grade:** 10W • 30



## HYTRAN UTTO

Mineral gear lubricant for mechanical transmissions and differentials.

**Specification:** API: GL4 • FNHA-2-C-201.00 • Ford: M2C 134 A-B-C-D • Ford: M2C 86-B-C •

Ford: M2C 41B, M2C 48B, M2C 53A • MF: M1127-1129A-1141-1135-1143-1145 •

Case: MS 1204-1207, 1209, 1210, JIC 143-185 • WB 101 • MAT3525 •

Renk Doromat: 873, 874A, 874B • Fiat-Renault-Same-Landini-Fendt-McCormick •

John Deere: JDM J20C, J20D • White Farm: Q1826 • Deutz-Allis, DD-Allison: C3-C4 •

Power Fluid 821XL • Caterpillar: TO-2 • ZF-TE-ML-03E-03F-05E-05F-06K •

Sperry-Vickers: I-286-S, M-2950-S • Kubota UDT • Komatsu Dresser: B-06-0001-B-06-0002

**Packings:** 20 and 205 Litre

**SAE Grade:** 10W-30 • 5W-20



## AIMOL PRODUCT PACKAGING RANGE

205, 20, 5, 4 and 1 litre



CAR +  
TRUCK +  
DRAGLINE



## FREEZE BS

Antifreeze and protective fluid for cooling systems (to be mixed with water).

**Specification:** BS 6580 • AFNOR: NF R15-601 • ASTM D3306 • ASTM D4656 • SAE J 1034  
**Packings:** 1, 5, 20 and 205 Litre

CAR +  
TRUCK +  
DRAGLINE



## FREEZE G12+

Antifreeze and protective fluid for cooling systems (to be mixed with water).

**Specification:** VW•Audi•SEAT•Skoda: TL-774D•F (G12+) • MAN: 324 SNF • MB: 325.3 • MTU-MTL: 5048 • GM•Opel: 6277M • Ford: WSS-M97B44D • ASTM D3306-D4340-D4985 • SAE J1034 • BS 6580 • AFNOR: R15-601 • KSM 2146 • Leyland Trucks: LTS 22 AF 1 • Mack: 014GS 17004 • Renault: Type D • Cummins: 85T8-2 & 90T8-4 • John Deere: H 24 B1 & C1  
**Packings:** 1, 5, 20 and 205 Litre

CAR +  
TRUCK +  
DRAGLINE



## RADIATOR COOLANT

Ready to use Mono Ethylene Glycol based antifreeze.

**Specification:** BS 6580 • AFNOR: NF R15-601 • ASTM D3306 • ASTM D4656 • SAE J 1034  
**Packings:** 5, 20 and 205 Litre

CAR +  
TRUCK +  
DRAGLINE



## BRAKE FLUID DOT 4

Synthetic fluid to be used in the brake systems (disc or drum) of almost any modern car.

**Specification:** SAE J 1703F (Jan. 1980) • FMVSS No. 116 -D.O.T. 4 • ISO 4925  
**Packings:** 1/2 Litre

INDUSTRIAL



## HYDROLINE HLP

Hydraulic oil.

**Specification:** DIN 51524 Part-2 (HLP) • AFNOR NF E 48603 HM • VDMA 24318 • US Steel 127 Cincinnati Milacron (for 32-46-68) • Vickers I-286-S, M-2950-S • FZG A-8.3-30>12 (ISO-VG 46 and higher) • FZG A-8.3-90=12 (ISO-VG 15-22-32) • ISO class L=HM (according ISO 6743•4) • Thyssen TH-N-256132  
**Packings:** 20 and 205 Litre  
**ISO-VG:** 10 / 15 / 22 / 32 / 46 / 68

INDUSTRIAL



## HYDROLINE HLP ZF

Zinc-free hydraulic oil.

**Specification:** ISO-L: DAA/DAB/DAG/DAH – 6743/4HM – 11158/HM • DIN 51524/2: HLP • US Steel: 126/127/136 • AFNOR: NFE 48-603 cat. HM • SS: 155434 • SEB: 181 222 • Cincinnati Milacron: P70 • Denison: HF-0/HF-1/HF-2 • Bosch Rexroth: RE 90220 • DIN51506: VBL/VCL/VDL  
**Packings:** 20 and 205 Litre  
**ISO-VG:** 32 / 46 / 68

INDUSTRIAL



## HYDROLINE HVLP

High viscosity hydraulic oil.

**Specification:** HLP DIN 51524 Part-3 (HVLP) • ISO classification L-HV (acc. ISO 6743•4) Vickers I-286-S-M-2950-S • Cincinnati Milacron • P86-P69-P70 (ISO-VG 32•46•68) • FZG A-8.3-90>12 (46 & 68) • VDMA 24318 • FZG A-8.3-90=12 (32) • US Steel 126-127 • Afnor NF E 48603 (HV) • Thyssen TH-N-256132  
**Packings:** 20 and 205 Litre  
**ISO-VG:** 15 / 32 / 46 / 68

INDUSTRIAL



## HYDROLINE HVLP ZF

High viscosity index zinc-free hydraulic oil.

**Specification:** DIN 51524 Part-3 (HVLP) • AFNOR NF E 48603 HV • VDMA 24318 • German Steel SEB 181222 • Denison HF-2 • US Steel 127 • Cincinnati Milacron • Sperry Vickers  
**Packings:** 20 and 205 Litre  
**ISO-VG:** 32 / 46 / 68





## INDO GEAR CLP

Industrial gear oil with EP characteristics.

- Specification:** Timken OK Load 75 lbs • CLP DIN 51517 part 3 CLP • US Steel 224 • AGMA 250.04 EP-9005-D94 • FZG gear test >12 • David Brown S1.53.101
- Packings:** 20 and 205 Litre
- ISO-VG:** 68 / 100 / 150 / 220 / 320 / 460 / 680



## COMPRESSOR OIL P

Compressor oil particularly suitable for piston compressors.

- Specification:** DIN 51506: VBL, VCL & VDL • ISO-L: DAA-DAB-DAG-DAH • DIN 51524: HLP • Vickers: I-286-S AFNOR: NFE 48-603 cat. HM
- Packings:** 20 and 205 Litre
- ISO-VG:** 100 / 150 / 220



## COMPRESSOR OIL S

Compressor oil particularly suitable for screw compressors.

- Specification:** DIN 51506: VBL, VCL, VDL • ISO-L: DAA-DAB-DAG-DAH • DIN 51524: HLP • Vickers: I-286-S • AFNOR: NFE 48-603 cat. HM
- Packings:** 20 and 205 Litre
- ISO-VG:** 32 / 46 / 68



## SLIDEWAY OIL

High quality oil to lubricate metal and plastic slideways.

- Specification:** DIN 51517 part 3: CLP • DIN 51524 part 2: HLP • Cincinatti Milacron: P47 (68) P50 (220)
- Packings:** 20 and 205 Litre
- ISO-VG:** 68 / 220

These are just a few examples of mainstream industrial lubricants. We have a complete range of highly specialised products available for every industrial application. See our website [www.aimol.nl](http://www.aimol.nl) and/or ask us.



AIMOL has a large range of car care and support products.

**Our range is much larger, so if you cannot find the product you are looking for: ask us!**

## SILICON SPRAY

Spray developed to lubricate applications which suffer from high temperatures, where water and other contaminants are found.

- Packings:** 400 ml

## GEAR GREASE

Lubricating grease for open gears, chains, cables and steel wire.

- Packings:** 200 and 500 ml

## PENETRATING OIL

Universal lubricating direct jet-spray.

- Packings:** 400 ml

## BRAKE CLEANER

Spray with high dissolving properties.

- Packings:** 500 ml

## HANDYMAN CAN

Universal lubricating direct jet-spray.

- Packings:** 150 ml

## COPPER GREASE

Copper spray to prevent wear and sticking of screwed connections which are exposed to very high temperatures.

- Packings:** 400 ml

## HANDCLEANER

General purpose heavy duty hand cleaning paste for use in workshops and factories.

- Packings:** 600 ml and 4,5 Litre

# TIME FOR QUALITY TIME FOR AIMOL

The AIMOL products have an excellent reputation in the market of high-quality lubricants. If you want to experience this reputation, then please contact us. We shall take all the time needed to handle your request.

#### Disclaimer

Because of continuous product research and development, the information in this publication is subject to change without notification. Although every effort is made to ensure accurate information, Anglo International Mining B.V. accepts no liability for any loss or damage suffered caused by the incorrectness and/or incompleteness of this text.







Haringvliet 543  
3011 ZP Rotterdam  
The Netherlands  
[www.aimol.nl](http://www.aimol.nl)  
[info@aimol.nl](mailto:info@aimol.nl)  
Tel: +3110 282 79 27

